SXB-05NRI



It is recommended that only persons who have sufficient knowledge and experience such as system designers and responsible persons deal with this product after carefully reading the product manual.

# 1 The matters of safety

## **M** WARNING


- \* Do not fabricate or do maintenance by yourself. Malfunction, Electric shock, and fire danger are considered. Contact us directly if you need the item to be repaired.
- \* Do not let the water touch the product. It may cause electric shock or fire due to malfunction.
- · When you check or maintain the product, make it sure you turn off the power. It may cause electric shock or fire due to malfunction.
- The item should be fixed to the target tightly. Electric discharging or breakage might happen.
- Please shield your installing circumstances first since the item releases the soft X-ray. Direct X-ray exposure is not recommended owing to cause health problem
- It includes a beryllium window on the X-ray tube unit in order to release soft x-ray for ionization. This beryllium material can cause respiratory disorder only if the person gets exposed to forms of either beryllium powder or smoke. However, our device doesn't create beryllium in neither of the mentioned forms. Please be careful not to break the device since there might be a slight chance that the device could partially degrade into the powder form, then it can cause harm defects. If the user touches the beryllium material on the device, clean oneself on the running water or rinse it off with soap directly, if the beryllium window gets dirty or damaged, call us directly for assistance.
- \* Do not use the product at the place where dangerous material such as inflammable or ignitable material exists. This product is not the product of anti-explosive type.
- This device is made only for industrial uses. You need to ground the device beforehand.
   Otherwise, there are in case of malfunction, electric shock, or fire damage.

#### CAUTION

- \* Do not disconnect the output cable with power applied. There is a possibility of electric shock or malfunction
- \* Connect wires referring to the product manual. Wrong connection can cause failures.
- \* For your proper cable connection, take a look at the manual finstallation & Connection of references. Any disordered connection is detected, the malfunction might arise.
- All cables should be connected all the time. Please careful of cable disconnections. If power or communication cables got damaged, replace them immediately. Malfunction and fire danger may happen.
- \* Do not install the device where the vibration can be detected. Any minor impact or vibration on the device, the malfunction or danger of accident might happen.
- \* Do not use the item off the range of usage(Electrostatic elimination).


  Malfunction or danger of accident may occur.

# 2 Check the package contents




#### ▶ Option

If you require extra functions with the basic accessories we provided, you need to purchase optional items in below for further assistant.




## 3 Nomenclatures of parts

▶ Bar Soft X-Ray Ionizer (SXB-05NRI Series)



#### ▶ Boost Module (SXB-BM) Option



## 4 Installation and connection


Check the installation conditions Bar soft X-ray ionizer
 Please check the installation condition whether it meets proper specification.

- Shielded Room
- There must be no objects between the target area and X-ray device.
- No vibration on the fixed device.
- Be aware of any flammable or ignitable materials around the working area.
- Secure to have enough working space for quick maintenance of the device.

## ▶ Bar soft X-ray ionizer installation


#### Basic Installation

Please fixing firmly to wall or rack by M4 bolts on side bracket.



#### Installation by Middle Brackets (Option)


If Bar soft X-ray ionizer cannot be installed using side bracket, it is recommended to install it using middle bracket. Please fix the middle bracket with M4 Bolts.



## ▶ Shielding method

#### Shielding Material Selection

See the following graph for references, Select the ideal tickness and quality of shielding material.




No.	Shield Material	Thickness [mm
1	SUS	Over 0.2
2	Aluminium	Over 0.25
3	Glass	Over 0.5
4	PVC	Over 0.6
(5)	Acrylic	Over 5.0



- Please shield the area where the customer is willing to install the soft X-ray device for safety issue,
- \* After shielding process, please connection to your own interlock system to operate the soft X-ray device on/off when the door is opened/closed.

# ► Shield installation compositions Please refer to the "Installation Compositions" for your references. Please keep your working environment of the leakage radiation level within the range of 1µSv/hr all the time



## **5** Maintenance



 This device uses the high level of voltage. When operating maintenance, please power off and unplug the device. Otherwise, there might be in case of electric shock or fire damage.

## ► Maintenance

X-ray type ionizer has own service life. The replacement is required after the service life.

If there are any malfunction or lifetime excess on the tube, please purchase the new tube and replace it according to the following procedure.

- Please do not operate the product when the tube is disconnected. It may cause electric shock or fire due to malfunction.
- When tube operates, heat is generated, Product is hot right after operation, so be careful not to touch it. There is a risk of burn.
- \* A H/V connector of tube is protruded. After unscrew the bolts, pull the unit
- vertically, Please be careful when replacing H/V connector,
- After replacement, check if tube and Head body are connected correctly. Unless they are connected properly, ground could be unstable.
- \* If the fixing bolt is not mounted, it can cause abnormal operation or defective issue. Make sure that the bolt is mounted before using it,
- Do not unscrew any bolts other than fixing bolts. If unscrewed, it can occur fire, electric shock, and breakages,

#### ① Unscrew a Fixing Bolt

Using X-head screwdriver, turn the bolts to counterclockwise to release.

#### 2 Pull out the tube

CAUTION

After loosen the tube fixing bolt and pull the tube downward.


## ③ Separating Tube

Separate the tube by pulling it downwards.

You can dispose of the tube by yourself or make a contact to SUNJE.

#### Replacing New Tube

After checking the direction of the high voltage connector of the new tube. insert it in the vertical direction and assemble in reverse.



\* After replacing the Tube, run "Tube Reset" on the controller. If the reset process is not performed, the replaced tube will not work

# 6 Problem solving


#### ▶ Checklist before called

Problem	Identifying Problem	Solution
Not operating	Is your power cable still plugged in?	Please re-plug the power cable and then turn the device on again.
	Was the proper voltage level applied for this set-up?	Please use the proper level of power input for the device. (AC 100~240V, 50/60Hz)
	Is the swith off at back of the controller?	Turn on the power switch.

Replace the proper fuse Is a fuse broken? immediately, Is there tube replacement LED Purchase and replace on the device? the tube unit(replaceable) Not operating Clear the remote off corresponding Is remote off? to FRemote Setup manual. Place Interlock on corresponding to Is Interlock off? 「Interlock setup manual. Have you followed the proper procedure Check whether the cable No signal for input/output signal cable(s) connection is properly done. lease refer to Finstallation & Connection Can't possibly ground the device? for(proper) grounding the device. Decreased Performance You need to replace the cables Any damages or cut on the cables? if it gets cut or damaged

## Dimensions

▶ Bar soft X-ray Ionizer (SXB-05NRI Series)

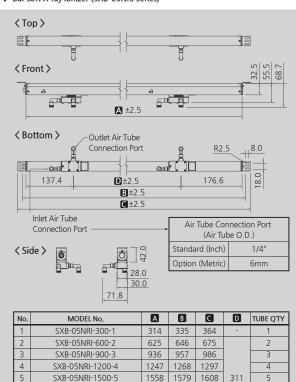

## 2802 \* The Air Tube Connection Port is applied in standard 1/4" Inch size, but if there is a desired size, it can be selected as an option.

1869

2180

2491

1890 1919

2512

2823 2852

2230

2541

6


SXB-05NRI-1800-6

SXB-05NRI-2200-7


SXB-05NRI-2500-8

SXB-05NRI-2800-9

#### ▶ Middle Bracket



#### ▶ Boost Module (Option)



# 8 Specification

Parameter	Description / Value
Ion Generation Method	Soft X-ray
Source	Soft X-ray Tube
Tube Voltage	4.9kV
Beam Angle	150°
Power Consumption (with Controller)	Max. 150W
Operation Circumstance	0℃~+50℃(32°F~122°F), 35%~85% RH
Controller	SXC-10BT / SXC-10BL Series only
Controller	(Can not compatible with other controllers)
Warranty	1 year

<sup>\*</sup> The appearance and specification of the product may be changed without prior notice for the improvement of the product.

# **SUNJE** Electrostatics

www.sunstat.com

#### Head Office & Factory (Busan) 8 Cheonggwang-gil, Ilgwang-Myeon Gijang-Gun, Busan, Korea T) +82-51-720-7500 F) +82-51-720-7501

Sales Headquarter (Osan)

795 Naesammi-dong, Osan-si, Gyeonggi-do,

T) +82-31-203-9034 F) +82-31-202-9034

Customer Center +82-70-7714-9033 Sales Contact +82-31-203-9034

Sunje Japan Co., Ltd.

Dai 7 Matsuya Bldg 10F 1005 2-23, Honmachibashi, Chuo-ku, Osaka, Japan T) +81-6-6949-5001 F) +81-6-6949-5011

Sunje (SHANGHAI) Trading Co.,Ltd.

Block C, 4F, No.482, Hongxu Road, Minhang District, Shanghai China T) +86-21-5433-9761 F) +86-21-5433-9762

Sunje Technology Co., Ltd. 2F, No.6, Lane. 102, Sinhe Rd, Sinfong Township,

Hsinchu County, Taiwan 30472 T) +886-3-568-7891 F) +886-3-568-7950



