

The Next Generation

Separate Soft X-ray Ionizer



SXN-15S

Suitable Ionizer for super clean process as there is no dust, electromagnetic wave, ozone. With 15kV application, it is effective for wide area and long distance. Module structure type makes tube replacement easy on site as it can be separated or combined. Furthermore, purchase by individual part is economical.



Key Features


- Easy attachable/detachable Module structure
- Prompt replacement is possible on the spot
- Cost saving due to individual Tube module purchase
- With 15kV application, it is effective for wide area and long distance
- With RMS(Real Monitoring System), possible to check operation status in real time (Option)

Specifications

Parameter	Description / Value
Ion Generation Method	Soft X-ray
Source	Soft X-ray Tube
Beam Angle	150°(decay time within 1sec. at 100mm)
Input Power	DC 24V
Power Consumption	Max 13W
Operation Circumstance	0°C ~ +50°C(32°F ~ 122°F), 35% ~ 85% RH
Weight	0.73kg
Alarm	Head Fail
Warning	Life Time Over
Remote / Interlock	Remote / Interlock On/Off Control
Indicator	Alarm State, Over Time State
Warranty	1 Year


※ The appearance and specification of the product may be changed without prior notice for the improvement of the product.

Dimensions

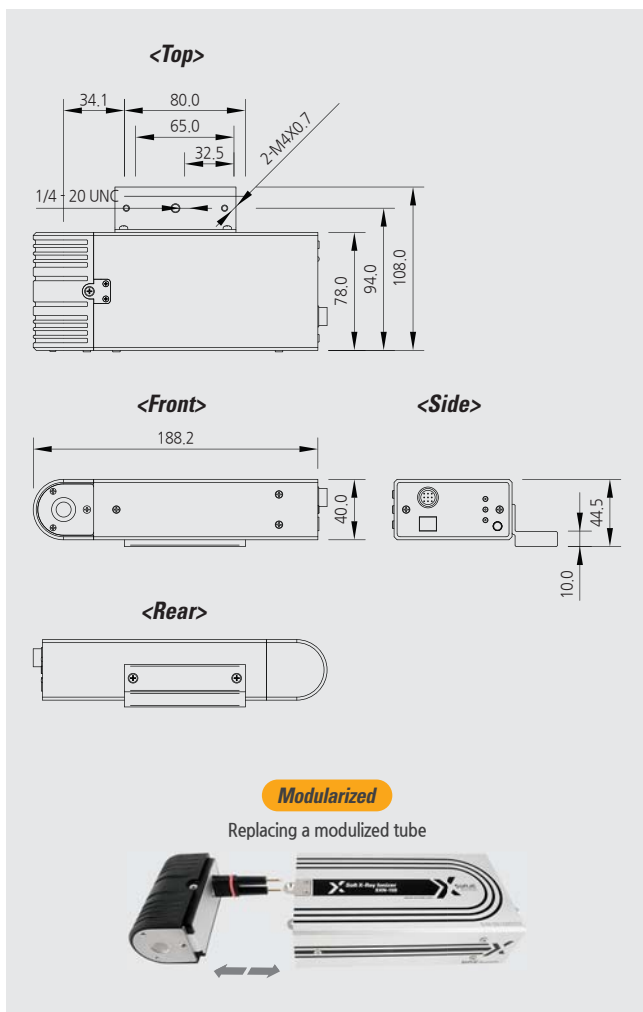

Performance

▶ Model : SXN-15S

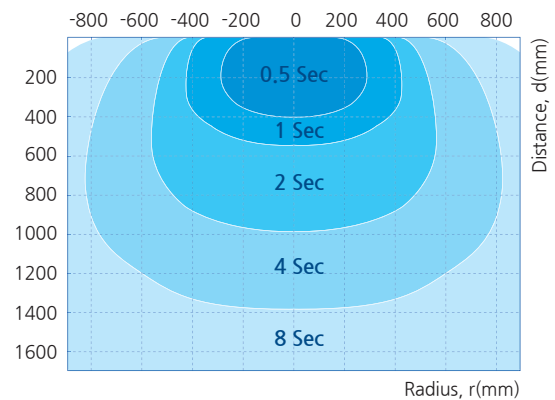

Applications

